

FieldShield®

FLEXdrop SC and LC Pushable Assemblies (UL Listed Plenum) —



Application

Designed to simplify the deployment of fiber, FieldShield FLEXdrop SC and LC Pushable Assemblies provide a tech-friendly field assembled connector that snaps together in seconds without jeopardizing fiber protection or optical reliability. FieldShield Pushable Assemblies greatly reduce installation costs for Fiber to the Home (FTTH) installations, business class services, cell backhaul or any other small count delivery application.

Description

FieldShield FLEXdrop SC and LC Pushable Assemblies are factory terminated and polished SC and LC connectors designed to be terminated on simplex FieldShield Pushable Optical Fiber Assemblies. After being pushed or pulled through FieldShield Microduct, the smooth wall protective sleeve is easily removed and an outer housing is snapped into place. This creates an industry standard connector without mechanical or fusion splicing. All SC and LC FieldShield Pushable Assemblies styles can be pushed/pulled in all FieldShield Microducts.



Features and Benefits

Integrity

- FLEXdrop fiber cable designed, tested and certified to Telcordia GR-20
- Terminations are designed, tested and certified to Telcordia GR-326
- Available in singlemode SC/UPC, SC/APC, Simplex LC/UPC and Simplex LC/APC

Protection

- UL Listed for plenum applications
- Smooth wall protective sleeve is easily removed and an outer housing is snapped into place
- Passed UV testing and measurements standards per ASTM G155 for UL 1581
- Option for FlexConnector in YOURx applications

Access

- Zirconia ceramic ferrule measuring 1.25 mm O.D.
- Tool-less installation

Investment

- Tech-friendly pre-terminated pushable connectors rapidly decrease deployment times and reduce installation costs by eliminating in-field splicing
- Pushed directly into a Clearview Cassette, FieldShield is optimized for placement alongside Clearfield's FieldSmart® fiber management platforms


Packaging



Lengths up to 50'
(9.75 m)



Lengths from 50' to 350'
(9.75 m to 106.68 m)

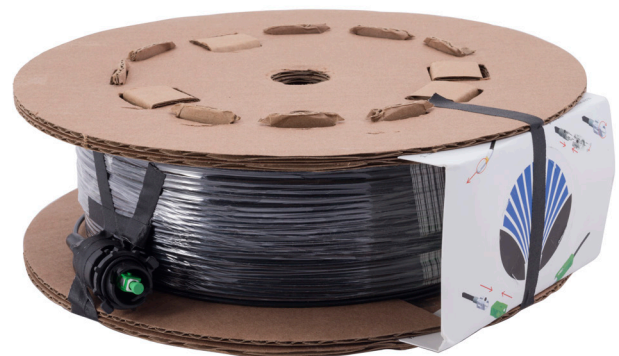

Lengths greater than 350' (106.68 m)

Technical Specifications

Minimum Performance Specifications for Terminated Singlemode Connectors

Connector Type	Ferrule Material	Polish Type	Ins. Loss, Typical	Max. Ins. Loss	Min. Ret. Loss
SC or LC	Ceramic	UPC	0.15 dB	0.30 dB	55.00 dB
SC or LC	Ceramic	APC	0.20 dB	0.30 dB	65.00 dB

Configured Part Numbers

F S - A _____ - _____ - _____ - _____ **XXXXM or XXXXF**

1 2 3 4 5 6 7 8 9

1 Select Cable Type
P = FLEXdrop Black
W = FLEXdrop White

2 Select Mode/Type
2 = Singlemode (900 μm)

3 Select Fiber Count
001 = Simplex
002 = Duplex

4 Select Connector #1
1 = Pushable LC/UPC
2 = Pushable LC/APC
3 = Dual LC/UPC Unibody
4 = Dual LC/APC Unibody
B = Pushable SC/UPC
D = Pushable SC/APC
A = SC/UPC
C = SC/APC
E = LC/UPC
G = LC/APC
J = FC/UPC
K = FC/APC
M = ST/UPC
W = HFOC SC/APC

5 Select Breakout #1
U = Hardened Connector
Q = YOURx
Z = N/A

6 Select Upjacketing #1
Z = N/A

7 Select Connector #2
1 = Pushable LC/UPC
2 = Pushable LC/APC
3 = Dual LC/UPC Unibody
4 = Dual LC/APC Unibody
B = Pushable SC/UPC
D = Pushable SC/APC
A = SC/UPC
C = SC/APC
E = LC/UPC
G = LC/APC
J = FC/UPC
K = FC/APC
M = ST/UPC
W = HFOC SC/APC
Z = None

8 Select Breakout #2
U = Hardened Connector
Q = YOURx
Z = N/A

9 Select Upjacketing #2
Z = N/A

XXXXM or XXXXF
XXXXM = Length in meters
XXXXF = Length in feet

Accessories

Field Installable FlexConnector (FIFC)

- Once the cable has been prepped with the FlexConnector, the 3 mm cable is sandwiched between the two retainer clips. The FlexConnector is then pushed and snapped together with the retainer clips, pinching the grommet seal for a water-tight assembly.



Field Installable FlexConnector Pre-Configured Part Numbers

Part Number	Description
FS-FIFC-103-6PAK	Field installable FlexConnector, 10 mm Port, 3 mm Cable, Black Grommet, 6 Pack
FS-FIFC-143-6PAK	Field installable FlexConnector, 14 mm Port, 3 mm Cable, Gray Grommet, 6 Pack
FS-FIFC-144-6PAK	Field installable FlexConnector, 14 mm Port, 4 mm Cable, Red Grommet, 6 Pack

Description

For field installed applications, these three kits allow a water-tight transition from 3 mm and 4 mm cable, into the FlexPort. The kits include enough parts for six tool-less installations.