


FieldShield D-ROP

Installation Manual

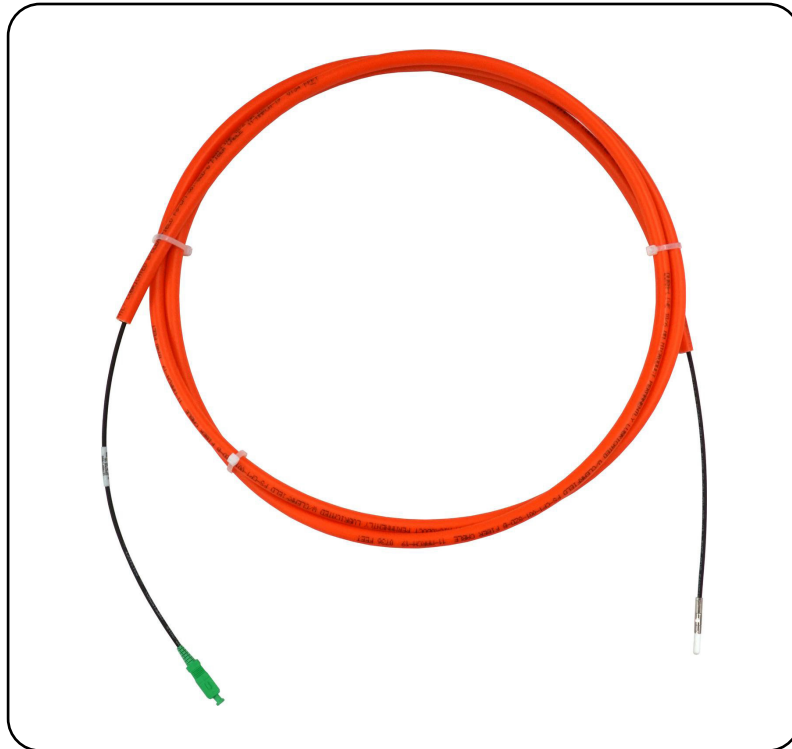

Are you?

**CLEARFIELD
CERTIFIED**



Clearfield College Product Training

Clearfield's Certified Partnership Training Program (CPTP) is open to customers and contractors with the desire to become a Clearfield partner.

SIGN UP TODAY to learn the proper installation techniques for Clearfield products.

It's FREE!!

www.seeclearfield.com/training/clearfield-college/certified-partnership-training.html



Table of Contents

Application.....	3
Description.....	3
Technical Specifications.....	3
Packaging.....	4
Required Tools.....	4
Installing into FlexPorts.....	5
Reducing Duct Length.....	6
Connector Cleaning Procedure.....	7
Standard Warranty.....	12
Proprietary Notice.....	13
Technical Support.....	13

Application

Building upon the restoration promise of FieldShield Pushable Fiber, FieldShield D-ROP is a pre-connectorized drop cable delivered to market pre-placed in microduct. The microduct plugs directly into the FieldShield FlexPort, providing an air-tight, water-tight connection between the YOURx-TAP and the YOURx-Terminal.

Installed as a single-pass deployment, FieldShield D-ROP provides ease of restoration. In the event of a future fiber cut, a field technician easily identifies the cut area, and utilizes a simple coupler and a FieldShield Fiber Assembly to restore service.



Description

D-ROP cable presents the same footprint as a flat drop cable with the added advantage of being restorable. As with all FieldShield ducted solutions, fiber cuts are located and microduct is repaired with repair kit. A new pushable assembly is installed, minimizing costs and time to restore the service outage. It provides a completely protected pathway from the access point directly to the premise, business or antenna with the option for restoration after accidental fiber cut. D-ROP does not have the slack storage challenges that a flat drop presents because the duct slack can be ring cut and removed leaving only the fiber assembly.

Technical Specifications

	FieldShield D-ROP Direct Bury	FieldShield D-ROP Riser Rated
Outside Diameter	0.394" (10.01 mm); Oversheathed Toneable 0.50" (12.70 mm)	0.33" (8.5 mm)
Inside Diameter	0.246" (6.25 mm)	0.23" (5.9 mm)
Installation Tension	340 lbf	96 lbf
Min. Bend Radius	Non-toneable: 6" (152.40 mm) Radius Minimum; Toneable: 7" (177.80 mm) Radius Minimum	76.2 mm/3 mm
Material	High Density Polyethylene (HDPE)	Thermoplastic
Operating Temperature	-40°F to 176°F (-40°C to 80°C)	-40°F to 176°F (-40°C to 80°C)
Installation Temperature	-14°F to 158°F (-26°C to 70°C)	-14°F to 158°F (-26°C to 70°C)
Color	Orange	Beige
Tone Wire	Insulated Copper 0.032" (0.813 mm)/20 AWG (Tone Only)	N/A

FieldShield D-ROP

Installation Manual






Packaging




Do not remove zip tie and protective covering until duct has been direct buried.

Required Tools

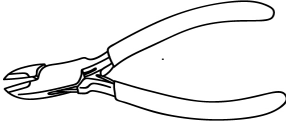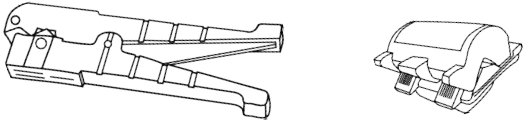Find No.	Tool	Image
001	Deburring Tool	
002	Wire Snips	
003	Rotary Cutter	

Installing into FlexPorts

1. If present, remove the FlexPort's tab. Use a pair of pliers to snap off tab of selected FlexPort.

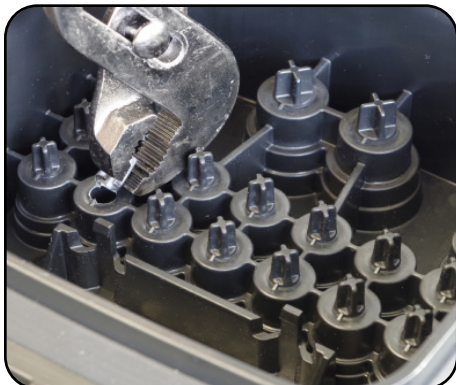

2. De-Burr the FlexPort, using an appropriate tool (Clearfield recommends de-burring tool) to ream and chamfer edges of port.



3. Bring the preconnectorized fiber through the FlexPort.



4. Fully seat the microduct into the FlexPort.



5. Follow assembly instructions for the selected connector. Inspect the connector, and clean if necessary.



6. Route fiber through fiber management. Make the connection.




FieldShield D-ROP

Installation Manual




Reducing Duct Length


1. If tone wire is present, unwrap the wire and rip cord.

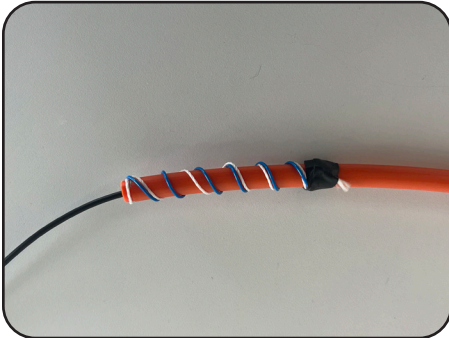


2. Prepare a small notch in the tone wire jacket to assist the rip cord, taking care not to cut it.

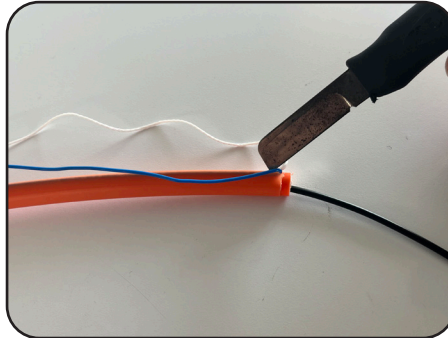

3. Pull the rip cord the desired length and trim the excess tone wire jacket away.

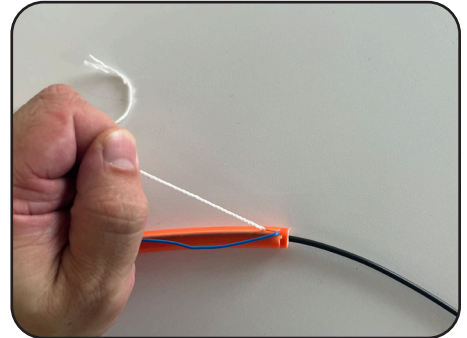

4. Determine exact length of duct to remove and mark the duct. Using a rotary cutter, score the duct at the mark.

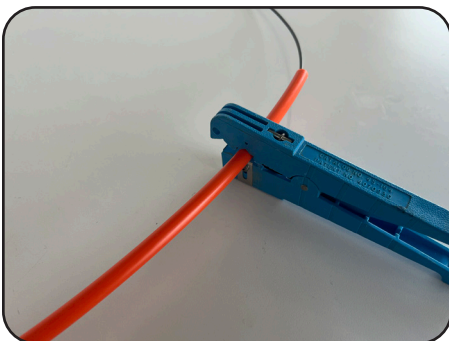

5. Gently apply pressure at the score until the duct snaps. Fully separate the two duct pieces while taking care to not damage the cable.



6. Slide the excess duct off of the cable.



Connector Cleaning Procedure

Whether factory terminated or field spliced, clean connectors are essential for proper system operation. Even the smallest dust particle can cause transmission problems, so for optimal network performance inspect, and if necessary, clean connectors and adapters prior to mating.

Inspect Then Connect

These are Clearfield recommended products/applications. Use the product you feel will complete your cleaning procedures. Create a “best practice” for your company and follow those procedures.

The use of Chemtronics end face and bulkhead cleaning products and techniques ensures a clean end face, no matter the type of contamination.

Before cleaning any connector, be sure you know what type of contaminate you are cleaning (dry, fluidic, or combination). All the available products are good, it's the process that you need to be aware of. Using a dry cleaning method to clean “dirt” can lead to scratching of the end face. Learn the process of cleaning properly.

Note: It is **NOT** recommended to use isopropyl alcohol to clean the end face.

Cleaning an SC/LC Connector

Cleaning the End Face

- Place one wiping paper on QbE-2 FiberSafe™ Cleaning Platen. (Figure 1)
- Apply small amount of precision cleaner (about 1” in diameter) with Electro-Wash MX pen on to one end of the wipe. (Figure 2)
- Hold end face at a 90 degree angle. For APC connection, adjust by slightly tilting the container or end face. Angle is correct when no drag is felt on the end face. (Figure 3)
- Draw end face from wet to dry part of the wipe 3 times. Use just enough pressure to ensure complete contact between end face and the wipe.

Note: **DO NOT** retrace previous step.



Figure 1



Figure 2



Figure 3

Cleaning the Ferrule

- Lightly moisten the fiber optic swab (2.5mm/38542F or 1.25mm/38040) by spotting a small amount (about 1") of Electro-Wash PX or Electro-Wash MX pen onto the QbE. Hold the swab, 1 side down to the wetted area and hold for a count of 1-2-3-4-5. (**Figure 4**)

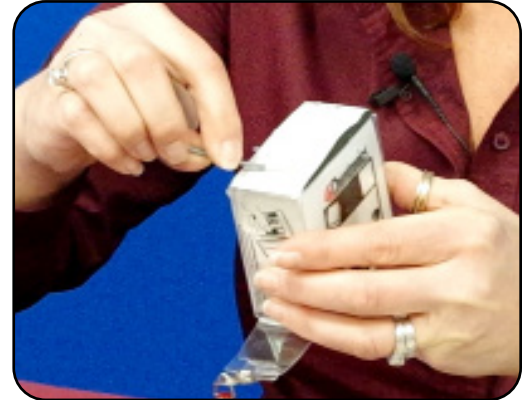


Figure 4

- Insert swab into side of ferrule, wet side to the ceramic ferrule and circle around 2-3 times and remove. Turn swab to dry side and repeat. (**Figure 5**)



Figure 5

Cleaning the Mate Through an Adapter AND the Adapter Itself

- Lightly moisten the fiber optic swab (2.5mm/38542F or 1.25mm/38040) by spotting a small amount (about 1") of Electro-Wash PX or Electro-Wash MX pen onto the QbE. Hold the tip of the swab onto the wetted area and hold for a count of 1-2-3-4-5.
- Insert the swab into the adapter to the connector, press lightly against the connector, twist 2-3 times, remove and discard.
- Dry with a second dry swab.
- Inspect, repeat cleaning if necessary, and test for signal strength.
- Use additional swabs to clean inside the actual adapter. Moisten swab, like above, and insert through hole and remove while twisting. (**Figure 6**)


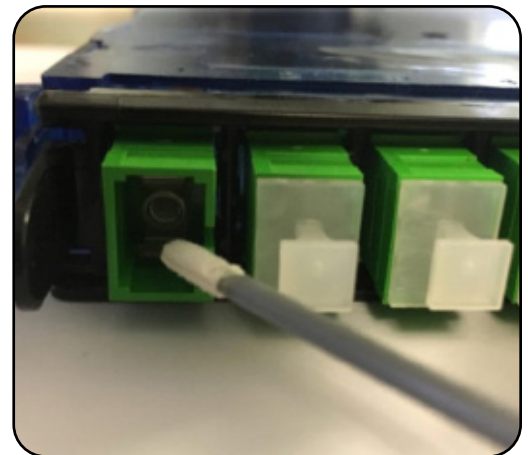


Figure 6



Cleaning an MPO/MTP Connector

Male Connector

- Use of Chemtronics MTP Connector Cleaning Swabs (CC505F) is recommended. Even after cleaning with a probe cleaner, you should always clean the pins with this (or an equivalent) type swab. Cleans ALL MTP/MPO connector end faces. This swab also cleans the “pins” of the male connector
- Lightly “spot” a QbE-2 wipe on the platen with Electro-Wash PX Fiber Optic Cleaner, the FiberWash or MX Pen.
- Lightly touch short side of the MTP/MPO Connector Swab to the wetted area (3-5 secs) to absorb some cleaning solution (DO NOT over saturate the swab).
- Wipe connector areas to be cleaned, sliding pad from bottom of pad across and forward to tip of swab, from 1 side to the other, turn over and use long side to dry in same movement.

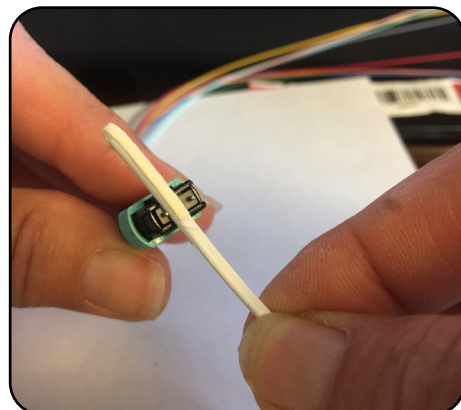


- Use the hole on end of pad to clean one alignment pin, then press the end of the swab into the other pin to clean.
- Check your work with a fiber scope. This can take several attempts to get the endface clean.

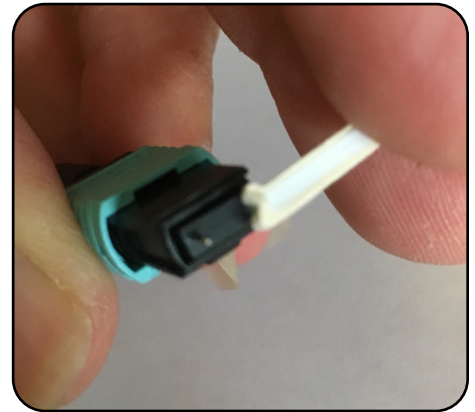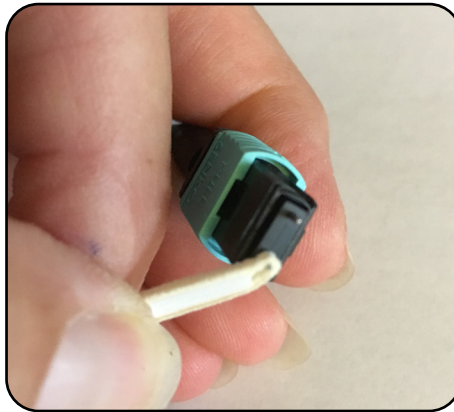


Female Connector (without pins)

- Cleaned like a single fiber connector, using a cleaning platform. The receptacles will be cleaned as long as you are using a combination cleaning process as recommended.
- Again, using a platen, moisten the platen with cleaning solvent on one end to accommodate 3 swipes of the MPO female endface.
- Holding the connector (If APC, slightly at an angle to accommodate for 8° angle) swiping with medium pressure, from the wet area into the dry area 3 times, without wiping over previous area.
- Inspect, and if clean, make the connection. If NOT, repeat above steps until clean or if determined that the end face is damaged (based on standards of 5 cleanings per connection), replace.


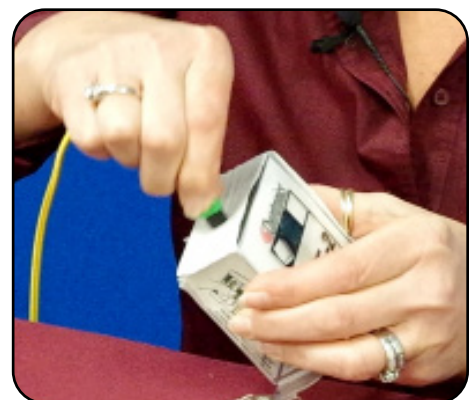


Cleaning Using a Probe-Style Cleaning Tool

- The probe style cleaning tools are capable of cleaning a connector end face separately or through the adapter.
- Slightly engage probe by pulling back but do not allow to click. Lightly “spot” a QbE-2 wipe on the platen with Electro-Wash PX Fiber Optic Cleaner, this will help alleviate “over saturation” of the material.
- Lightly touch the tip of probe and release.

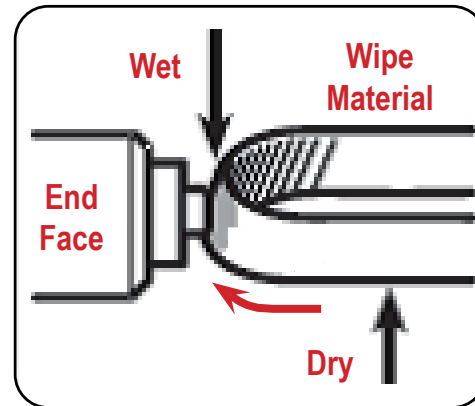

- Insert connector or insert probe through adapter and click 2-3 times to move past the wet area and allow material to dry wipe.

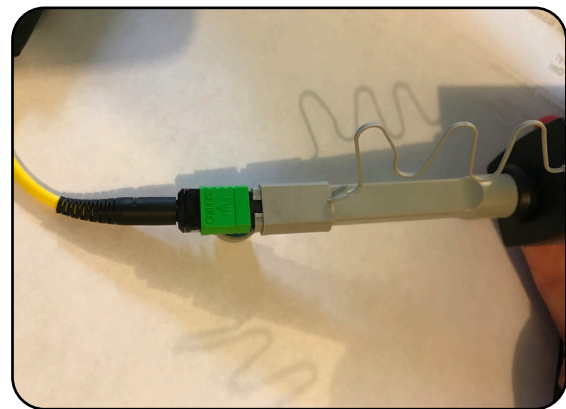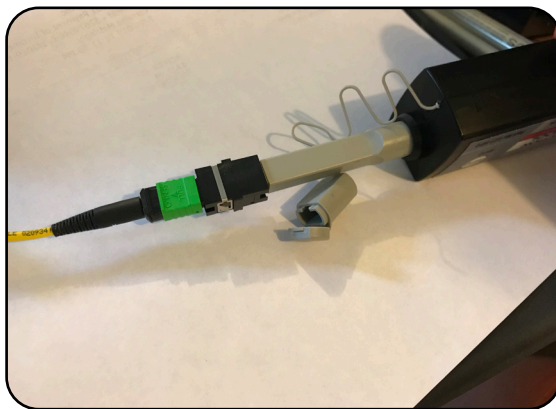

- Inspect connector, repeat if necessary (following standards)
- If cleaning a male connector, clean the pins (see above)

FieldShield D-ROP

Installation Manual



Standard Warranty

Clearfield warrants to the original purchaser of the Product sold hereunder is free from defects in material and workmanship under normal use and service, subject to exceptions stated herein. Product purchased is warranted as follows: Clearfield designed and branded Products are warranted for three (3) years; Products manufactured by Clearfield to customer prints and/or specifications are warranted for one (1) year; and any Product Clearfield acquires from or through a third-party manufacturer or distributor and resells to Customer as the original customer will carry the manufacturer's pass-through warranty, if any. In all cases, the warranty period commences on the date of shipment to the original purchaser.

Warranty Claim Procedure

If any Product purchased from Clearfield is found defective under the above warranty, the following basic procedure must be followed:

1. Customer must contact Clearfield and obtain a Return Materials Authorization
2. Following authorization, the Customer ships the product-freight collect to Clearfield's manufacturing facility
3. Clearfield shall repair or replace the defective Product at its sole option and discretion, and return the repaired or replacement Product to Customer's site, freight prepaid

Note: If the Product is not found to be defective at Clearfield, the product will be returned to the Customer and the customer billed for freight in both directions.

Limitations of Warranty

Correction of defects by repair or replacement, at the option of Clearfield Inc, shall constitute the exclusive sole remedy for a breach of this limited warranty. Clearfield shall not be liable under any circumstances for any special, consequential, incidental, punitive, or exemplary damages arising out of or in any way connected with the product or with agreement to sell product to buyer, including, but not limited to damages for lost profits, loss of use, or for any damages or sums paid by buyer to third parties. The foregoing limitation of liability shall apply whether the claim is based upon principles of contract, warranty, negligence or other tort, breach of statutory duty, principles of indemnity or contribution, the failure of any limited or exclusive remedy to achieve its essential purpose, or otherwise.

Clearfield will not be responsible for any labor or materials costs associated with installation or incorporation of Clearfield products at customer sites, including any costs of alteration, replacement or defective product, or any field repairs.

Other Limitations

1. Clearfield assumes no warranty liability regarding defects caused by:
2. Customer's modification of Product, excepting installation activities described in Clearfield documentation
3. Customer re-packaging of Product for shipment to third parties or destinations other than those originally shipped to by Clearfield, or any defects suffered during shipping where the Product has been re-packaged
4. Customer's installation or maintenance, excepting activities described in and performed in accordance with Clearfield documentation
5. Customer's improper or negligent use or application of Product
6. Other causes external to the Product, including but not limited to accidents, catastrophe, acts of God, government action, war, riot, strikes, civil commotion, sovereign conduct, or the acts or conduct of any person or persons not party to or associated with Clearfield



FieldShield D-ROP

Installation Manual

Proprietary Notice

About FieldShield Product Line Application

Information contained in this document is copyrighted by Clearfield, Inc. and may not be duplicated in full or part by any person without prior written approval of Clearfield, Inc.

Its purpose is to provide the user with adequately detailed documentation to efficiently install the equipment supplied. Every effort has been made to keep the information contained in this document current and accurate as of the date of publication or revision.

However, no guarantee is given or implied that the document is error free or that it is accurate with regard to any specification.

Technical Support

Clearfield, Inc. can be contacted for any issues that arise with the supplied product.

If you need to return the supplied product, you must contact the Clearfield, Inc. Customer Service Department to request a Returned Materials Authorization (RMA) number.

Clearfield, Inc.
7050 Winnetka Ave N
Minneapolis, MN 55428

Toll Free: 800.422.2537
Phone: 763.476.6866
Fax: 763.475.8457

Customer Support: sales@seeclearfield.com
Technical Support: techsupport@seeclearfield.com