

Clearview® Blue Cassette Mounting Ears


Installation Manual



The Clearview Blue Cassette is able to mount into a number of Clearfield products using a flexible system of mounting ears and retaining screws or push/pull plungers. Below you will find **instructions on how to install each mounting variation** and a list of products in which each variation will be used.

Installing Mounting Ears

From the front of the cassette, slide the mounting ear's channel onto the t-rail on the side of the cassette. Push the mounting ear until it snaps into place. MOCs and cassettes 2 high or taller: slide mounting ear on from back of cassette.

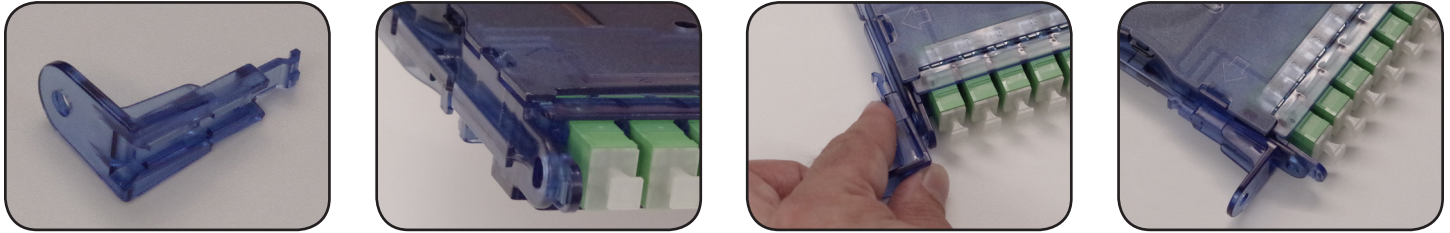

Mounting Option	Products
No Mounting Ears	FxHD Frame System, Flex Box, KIS Box, NDP Wall Box, 5.5" Deep Indoor/Outdoor SCD Wall Box
One Mounting Ear	FxMP Panels, 144 PON Pedestal Insert
Two Mounting Ears	All other products (special cassette mounting instructions may be included with product)

Installing Retaining Screws

To mount cassettes into products utilizing retaining screws, insert the retaining screws into the holes in the mounting ears. Depending on the product, retaining screws will be inserted in either the front or the back of the mounting ear. Screw the cassette into place in the product using the retaining screws.

Mounting Option	Products
Front Installed Retaining Screws	FxDS Panels, FxDS PON Insert, 96 & 144 PON Pedestal Inserts
Back Installed Retaining Screws	FSC & FDH Cabinets, 24 & 48 Outdoor Wall Boxes, 36, 96 & 144 Indoor Wall Boxes



Installing Push/Pull Plungers

Push/pull plungers are used in FxMP Panels. Push the grommet piece through the hole in the mounting ear, then the plunger. Push the plunger until it clicks, then pull back to release the expansion. To install cassettes into the product, insert the push/pull plunger through the hole and push the plunger to expand the grommet and secure the cassette into place.

